


# Sliding Doors

# Visoglide Plus

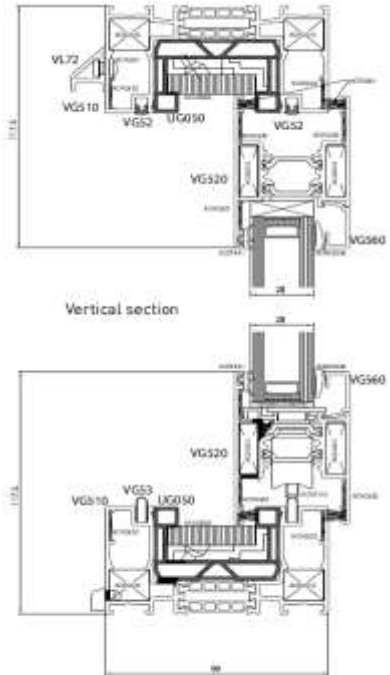

<b>Range</b>	Visoglide Plus
<b>Finish</b>	Polyester powder coating to BS6496 (Marine Grade +60 microns)
<b>Appearance</b>	Contemporary frame, sash and bead
<b>Stock colours</b>	White gloss, RAL 7016m, RAL 9005m and Ral 7016m on white
<b>System glazing</b>	Internally glazed
<b>Thermal break</b>	Polyamide thermally broken profile
<b>Gaskets</b>	Low line gasket for slimmer sightlines
<b>DER</b>	down to B rating using suitable double glazed unit
<b>U Value</b>	down to 1.5W/m <sup>2</sup> k with double glazing and 1.2 W/m <sup>2</sup> k with 36mm triple glazing
<b>Locking system</b>	Multipoint lock by Smart
<b>Security</b>	PAS24 upgraded specification available
<b>Cylinder</b>	Standard Mila, upgrade to Ultion for PAS24
<b>Rollers</b>	Adjustable Ciilock rollers tested to 50,000 cycles (approx 25 years use)
<b>Handles</b>	Key locking handles by Smart
<b>Frame Depth</b>	two track 99mm / three track 165.5mm
<b>Interlock sightline</b>	Standard 83mm and Slimline 35mm
<b>Max o/a height per sash</b>	2500mm
<b>Max Sash weight</b>	200kg (Special option 250kg available using Smarts non adjustable rollers)
<b>Max o/a width per sash</b>	within above limitations
<b>Glazing sizes</b>	28mm double glazing and 36mm triple glazing
<b>Air Test</b>	Class 3 600Pa
<b>Water test</b>	Class 7A 300Pa
<b>Wind test</b>	Class AE 2400Pa
<b>Add ons</b>	42mm add on available
<b>Threshold</b>	Threshold with internal upstand available (flush internal floor levels)
<b>Trickle Vents</b>	Trickle vents are fitted into a 42mm add on
<b>Service</b>	
<b>Delivery</b>	on dedicated Atlas vehicles (outer frame flat pack kit available)