

**VISOGLIDE PLUS ORDER/QUOTE FORM**Please tick for  
quote only ☐

Page \_\_\_\_ of \_\_\_\_.

Aluminium Direct Fax: 01453 827801 E-mail Orders: sop@atlas-aluminium.co.uk

Company Name (Acc No): \_\_\_\_\_

Signature: \_\_\_\_\_

Preferred Delivery Date: \_\_\_\_\_

Print Name: \_\_\_\_\_

Order Ref: \_\_\_\_\_

Date: \_\_\_\_\_ Contact Numbers: \_\_\_\_\_

Please e-mail confirmation to: \_\_\_\_\_

**Please Circle Items Required****Part Q Compliant:** Y / N (If yes, locks will be upgraded at an additional charge)**Outer frame:** Standard / Internal upstand**Colour:** White (G) / Grey (7016M) / Black (9005M) /  
Dual Grey Ex (M) & White Int (G)**Wind loading reqd:**  
800 pascals (default) or \_\_\_\_\_ pascals or Site postcode  
for wind load calc \_\_\_\_\_.**Sliding door on:** inside track (default) / outside track**Cill:** None Two Track 150mm / 190mm  
Three Track 235mm\* / 300mm**Interlocking Mullion:** Standard 83mm / Slim 35mm**Handle Type:** D / Lever-Lever  
Internal Only / Internal & External**Threshold:** Two Track / Three Track  
Two Track internal upstand / Three Track internal upstand

(Q) = Selection may need to be upgraded to meet Part Q.

**Handle Colour:** White / Black / Grey / Satin Silver  
(Note: Chrome n/a)**Glass Supply:** Glazed / Unglazed**Glass Spec:** Double Glazing 28mm T 28.8mm Lam  
Triple Glazing 36mm T 36.8mm Lam**Standard Thermal Rating:**

Door Energy Rating C with 28mm Cl tgh, 1.2 Softcoat, Argon, Black W/edge

Glass Special Requirements \_\_\_\_\_

**Nickel Cylinder<sup>(Q)</sup>:** STD Key-Key / STD Thumb Turn




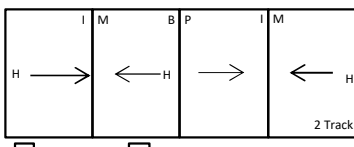


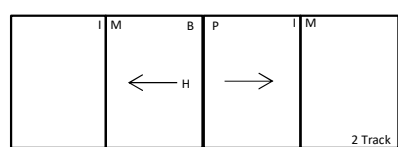
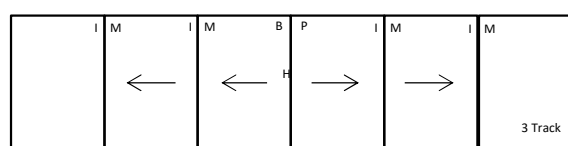
3\* Security Key-Key / 3\* thumb Turn

**Trickle Vent(s) fitted in 42mm add-on:** QTY [ ]**Trickle Vent Size EA:** None / 2700 / 4000 / 5000**TV Colour:** White / Black / Grey / Silver / Grey on White**Deliver:** Assembled \* / Flat pack frame + sashes

\*You will need to ensure able bodied people are available to assist with offloading at the delivery address. If this requirement is not met you will be charged for the redelivery of the product.

**Please indicate style by ticking box ('H' indicates handle position)**

Interlocking mullion Bi-parting mullion

	
<input type="checkbox"/> As shown	<input type="checkbox"/> As shown <input type="checkbox"/> Reverse
	
<input type="checkbox"/> As shown <input type="checkbox"/> Reverse	<input type="checkbox"/> As shown <input type="checkbox"/> Reverse
	
<input type="checkbox"/> As shown <input type="checkbox"/> Reverse	<input type="checkbox"/> As shown <input type="checkbox"/> Reverse
	
<input type="checkbox"/> As shown <input type="checkbox"/> Reverse	
	
<input type="checkbox"/> As shown <input type="checkbox"/> Reverse	

**Note: Viewed externally****Key Limits**

Max sash width for 4mm tgh = 1400mm (approx)

Max sash width for 6mm tgh = 1700mm (approx)

Max sash height = 2500mm

Max sash weight = 200kg

**Key Dimensions**

Std 2 track frame is 99mm / 3 track frame is 165.5mm

Internal upstand 2 track frame is 116mm / 3 track frame is 182.5mm

Standard track plaster cover 43mm

Internal upstand track plaster cover 53mm

Frame to glass sightline 117.5mm

Bi-parting mullion sightline 156mm

\*Note: a 235mm cill is a two piece cill 150+85.

Qty	Sizes (mm) Including Cills & Add-ons	42mm Add-ons (required with t/vents)	Special Requirements
	W	T	
		B	
	H	L	
		R	
	W	T	
		B	
	H	L	
		R	